AFCRL-67-0578

Laboratory
of
ELECTROMAGNETIC THEORY

THE TECHNICAL UNIVERSITY
OF DENMARK
LYNGBY

D D C

NOV 20 1967

C

57

Contract AF 61(052)-794

FINAL SCIENTIFIC REPORT

"Reflector Arrays"

1 April 1964 - 30 June 1967

E. Dragø Nielsen

July 1st, 1967   S 127 R 59

DISTRIBUTION OF THIS
DOCUMENT IS UNLIMITED

ABSTRACT

The Van Atta reflector was first described in a patent by Dr. L.C. Van Atta in 1959. The advantage of this passive reflector type should be that the reradiated field has a maximum back in the direction of arrival of the primary plane wave. Since this retrodirective effect of the reflector might be of great importance if used as a navigational aid in the air or at sea, it & med worth while to carry out a theoretical investigation of such reflectors, especially since only experimental investigations had been made before this contract was initiated.

The work performed under the contract deals mainly with theoretical and numerical investigations of Van Atta reflectors consisting of dipoles. A survey of the literature concerning active or passive Van Atta reflectors has been made. Both a linear and a two-dimensional plane Van Atta reflector has been investigated numerically and a theory for arbitrary Van Atta reflectors has been developed. An experimental investigation of a linear Van Atta reflector was carried out and the results compared with the theoretical results.

TABLE OF CONTENTS

1. INTRODUCTION

The contract AF 61(052)-794 was running from April 1, 1964 to June 30, 1967.

The objectives of the contract were given as follows:

Carry out a theoretical investigation of the performance of a Van Atta reflector and, by electronic computer calculations, to find the radiation patterns of a number of such reflectors with various characteristics. It is expected that this would lead to a procedure for the design of a Van Atta reflector with a prescribed radiation pattern. It is the intention first to treat the linear and two-dimensional array, later the method of investigation may be extended to include Van Atta reflectors placed on circular cylinders and spheres. Further efforts will be made to supplement the theoretical investigation by experiment.

In this final report a summary of all the work performed under the contract is given. Some related work carried out at this laboratory but not paid by the contract is described, too.

First an analytical investigation of arbitrary Van Atta reflectors was carried out. Each pair of antenna elements with connecting transmission lines was described by an equivalent circuit. Reradiation from the elements and mutual interaction were taken into account. Next a theoretical investigation of a linear Van Atta reflector consisting of four parallel half-wave dipoles was performed. The dipole elements were equispaced and mutual impedances between the dipoles were taken into account. An expression for the reflected field was set up by superposition of the three fields involved. Further an analysis of the general shape of the reradiation pattern was made neglecting the mutual impedances. This analysis showed that for some combinations of the parameters involved the reflector does not act as stated in the patent description of Van Atta reflectors.

An experimental investigation of the four element linear Van Atta reflector was carried out in a radio-anechoic chamber. In agreement with the theoretical investigation, the experiments showed that the reflector only to a limited extent has the retrodirective effect stated in the patent description and that it has a mirror effect to the same extent as it has a retrodirective effect.

Numerical investigations of a four element Van Atta reflector and an optimization of the reflector with respect to the parameters involved was carried out using an electronic computer. The reradiation pattern of the reflector was optimized with the criterium that the minimum values of the

back-scattered field intensities for all angles of incidence should be as large as possible.

Finally a square Van Atta reflector consisting of half-wave dipoles was investigated theoretically and numerically. The effect of mounting the dipoles above and parallel to a conducting plate was also examined. The mutual impedance between the dipole elements and the reradiation both from the elements and from the plate was taken into account. All parameters involved have been varied in a numerical analysis of the reflector. The parameters are: the number of dipole elements, the length of the dipoles, the length and characteristic impedance of the transmission lines, the distance between the dipoles, and the distance from the dipoles to the conducting plate. The effect of changing the parameters is shown in curves of the back-scattering cross section of the reflector as a function of the variation of each of the parameters. The numerical results have been compared with experimental results obtained by others.

The last work on the contract has been an investigation of the band-width properties of a 4 by 4 element square Van Atta reflector consisting of dipoles.

2. SURVEY OF LITERATURE

Since Van Atta [1] in 1959 proposed his passive retrodirective reflector several papers have suggested the use of this reflector type in various communication systems [2] - [23]. Some of the papers tend to give an analytical treatment of the Van Atta reflector but most of them neglect the scattering by and coupling between the antennas. Many of the papers suggest active components inserted in the transmission lines of the reflector, such as modulated phase shifters [5], amplifiers [6] [10], and mechanical modulation by means of cavity resonators [9]. It has been suggested to use Van Atta reflectors for satellite communication and both passive, semipassive and active systems have been proposed [6] [15] [21] [22]. Other applications are for navigational aids, for example used to enhance the reflection from radartargets, from lifeboats, and from aircraft [3] [5] [7] [10]. A more detailed discussion of the literature concerning Van Atta reflectors and their applications is given in Scientific Report No. 1 and by Appel-Hansen [34] [35].

3. THEORETICAL INVESTIGATION OF
ARBITRARY VAN ATTA ARRAYS

A general treatment which may be used for a number of different investigations is described in Scientific Report No. 1 of the contract. The configuration investigated is shown in fig. 1. The elements are supposed to be dipoles, but the theory could easily be extended to other antenna types. The dipoles are placed on and parallel to an imaginary smooth surface which may be f.ex. a plane, a cylinder or a sphere. The field incident on the reflector is a plane wave.

The open circuit voltage induced at the terminals of each antenna element by the primary plane wave is calculated. Using these voltages a system of linear equations is developed for calculating the currents in each antenna taking into account the mutual impedances, the characteristics of the interconnecting transmission lines, and the induced voltage at the element itself (giving the scattered field) and at its mate (giving the retrodirective field).

When the currents are determined the reradiated field may be calculated. For a reflector with all elements parallel this is done using the theory of antenna arrays. Finally the properties of the reflector array are described by calculation of the differential scattering cross section.

The mutual impedances of the dipoles are calculated using the induced EMF method as given in Jordan's book [38]. Algol procedures for computing the mutual impedances between linear dipoles with sinusoidal current distributions and for arbitrary wire-antennas with a known current distribution has been developed at this laboratory.

The transmission lines are represented by equivalent circuits of the general x-circuit type. This type of equivalent circuit has been chosen because it has the advantage of being valid for all lengths of the transmission lines. It is assumed to be symmetrical and lossless.

Since both the induced voltages and the mutual impedances are complex quantities the real matrix equation to be solved will be of the $2N$th order where N is the total number of antenna elements. This means that it will be almost necessary to use an electronic computer for solving the matrix equation numerically when reflectors with more than two elements are treated.

A simple numerical example of a four element Van Atta array with equispaced half-wave dipoles is given in SR 1 in order to illustrate the theory developed. The numerical results indicate that a retrodirective effect as

stated by Van Atta is obtained to some degree. However the results also show that the mirror effect of the reflector is of the same order of magnitude as the retrodirective effect. The influence of the mutual impedances and of a mismatch between the antenna elements and the transmission lines may be utilized to change the reradiation pattern to compare better with a prescribed form.

4. A LINEAR VAN ATTA REFLECTOR
CONSISTING OF FOUR HALF-WAVE DIPOLES

A detailed investigation of a four element linear Van Atta reflector consisting of half-wave dipoles was carried out and is described in Scientific Report Nos. 2, 3, and 4 of the contract.

First an expression for the reflected field is developed considering each dipole as a receiving and transmitting antenna matched to its transmission line. When a plane wave is incident on the reflector a current distribution consisting of three different parts will be generated in the antenna elements. The first part is due to the energy transmitted to the antenna through the transmission line from its mate. The second part is the current induced in the antenna by the incident plane wave and the third part is induced in the antenna due to its mutual interaction with the other antennas of the reflector. Only the first part of the current distribution is considered in Van Atta's patent description, while the last two parts are neglected.

In fig. 2 is shown the retrodirective effect of the reflector due to the first part of the current distribution mentioned above. The second part of the current distribution creates a mirror effect of the reflector which when the dipoles are matched to the transmission lines is of the same order of magnitude as the retrodirective effect. This mirror effect which is shown in fig. 3 is not mentioned in the patent description of the reflector.

It is shown that the length of the transmission lines and the angle of incidence has a great influence on the reradiation, and for some values of these two parameters the first and second part of the current in the antennas are of opposite phase and they cancel each other so that the only reflected energy is the small part due to the mutual interaction between the elements. The length of the transmission lines at which the behaviour of the reflector is as much as possible in accordance with the patent description has been found but even this reflector has the mirror effect mentioned above.

Numerical analysis have been made with a spacing between the dipole elements of half a wavelength. It turns out that in most cases maximum reflection is not back in the direction of incidence of the primary plane wave, and that the mutual interaction between the dipoles causes asymmetries in the reradiation pattern. This means that it is possible to increase the back-scattered energy by choosing a proper combination of the distance between the elements and the length of the transmission lines. The above

mentioned investigations are described in Scientific Report No. 2.

In order to verify the theoretical results obtained, an experimental investigation of a four element linear Van Atta reflector was carried out in a radioanechoic box at the laboratory. This investigation is treated in Scientific Report No. 3. The four half-wave dipoles of the experimental reflector were slot fed dipoles with open-ended terminations. The length of the connecting transmission lines could be changed by means of line-stretchers thus examining the influence of the length of the lines on the reflecting properties of the reflector. The measurements were performed at 3.21 GHz as this frequency gives the best matching between each dipole and the connected transmission line.

The Van Atta reflector was placed on a moveable pedestal in the center of the anechoic box, and the measurements were based upon the principle of interference between the signal reflected by the reflector and a reference signal. Radiation patterns were measured in the plane normal to the axis of the dipoles for descrete values of the angle of incidence of the primary plane wave.

A good agreement between the experimental and theoretical results was found. The measured results confirmed the theoretical results of Scientific Report No. 2 and showed (1) that maximum reradiation is not always back in the direction of incidence, (2) that the reflector has a mirror effect to the same degree as it has a retrodirective effect, (3) that the reradiation depends strongly upon the length of the transmission lines, and (4) that the mutual impedances causes asymmetries in the radiation patterns.

As an extension of the theoretical analysis of the four element linear Van Atta reflector an optimization of this reflector has been carried out, the results of which is given in Scientific Report No. 4.

First the original expression for the reradiated field as derived in Scientific Report No. 2 was changed to a more general form which makes it possible to study the influence of asymmetries in the location of the dipoles, unequal lengths of the transmission lines, and a mismatch between the dipoles and the transmission lines. Further, a method was developed for computing a quantity which may be used as a measure of the deviation from the retrodirective effect of the reflector. This quantity is shown to be just as useful as the reradiation pattern itself when two different Van Atta reflectors are to be compared.

A perfectly working retrodirective Van Atta reflector has not been found. However, when mutual coupling is neglected, a condition for the smallest deviation from retrodirectivity has been derived. It is shown that the mutual coupling between the dipoles usually causes the reradiation of

the reflector to decrease and the deviation from retrodirectivity to increase. However for certain values of the parameters involved it turns out that coupling may increase the back-scattering up to 50% for some angles of incidence.

The numerical optimization of the reradiation pattern of the four element Van Atta reflector was carried out using a computational technique starting with an a priori reasonable set of parameters selected by examining 1600 different reflectors. The parameters were then perturbed about their initial values, the effect on the reradiation pattern was observed, and a new set of parameters giving an improved result was selected. The success of this method depends on the correctness of the original set of parameters and the computer program for perturbing the parameter values

An attempt was made to fulfil the following two criteria:

the minimum value of the back-scattered field intensity, as a function of the angle of incidence, should be as large as possible and the deviation from Van Atta effect as small as possible,

the minimum value of the back-scattered field intensity, as a function of the angle of incidence, should be above various prescribed levels and the deviation from Van Atta effect as small as possible.

For both optimization processes it turned out that the optimum value of the spacing was close to 1.5 wavelengths. Further it was found that, due to coupling, the minimum value of the back-scattered field intensity may be increased and the deviation from the retrodirective effect decreased if the transmission lines are permitted to be of unequal lengths and asymmetries are permitted in the location of the dipoles around the center of the reflector. However, the improvements are small and asymmetries often causes the opposite effect.

5. SQUARE VAN ATTA REFLECTORS
WITH OR WITHOUT A CONDUCTING PLATE

Another configuration of the reflector array is the plane, square Van Atta reflector consisting of parallel dipoles. The investigation of this reflector is described in Scientific Report No. 5.

The theoretical investigation of this reflector has already been described in Scientific Report No. 1. However, in order to be able to compare the theory with experimental results obtained by Sharp [2] the effect of mounting the dipoles above and parallel to a conducting plate has to be taken into account. The system investigated is shown in fig. 4.

The reflecting properties of the plate are supposed not to be influenced by the presence of the dipoles. The reflected field is found using the method of physical optics as described f.ex. in Kerr's book [39] for a plate the dimensions of which are not small compared to the wavelength.

The reradiating properties of the dipoles when the plate is present, is calculated as if the plate was infinite in extent, using the theory of images. The system of dipoles may then be treated along the same lines as in Scientific Report No. 1, but the induced voltage, the mutual impedances, and the determination of the field reradiated from the dipoles have to be changed because of the image.

The induced voltage is still found as described for an arbitrary reflector in Scientific Report No. 1, but now the electromagnetic field vector is changed in such a way that the distance from the dipoles to the plate is involved, according to ordinary reflection theory.

The new values of self- and mutual impedances are found using the method of images, too.

By using the values of the induced voltages and the values of the self- and mutual impedances thus found, the system of equations (23) of Scientific Report No. 1 will give the new values of the currents on the antenna elements when the presence of the plate is taken into account.

After that the reradiation pattern from the dipole reflector itself mounted in a distance h above the plate is calculated with the above-mentioned currents on the dipoles. The final reradiation pattern of the dipoles is found using the theory of antenna arrays on the array consisting of two parallel Van Atta reflectors in free space with the distance 2h, where h is the

distance between the dipoles and the plate.

The total field reradiated from the reflector system is found by adding the field reradiated from the dipoles and the field reflected from the conducting plate.

Using the above-mentioned theory a computer program has been developed and the numerical results have been compared with results obtained by Sharp from experimental investigations of a 16 element square Van Atta reflector. The computed back-scattering cross section shows a good agreement with the results measured for the experimental reflector as shown in fig. 5.

Furthermore, a series of computations has been performed in order to examine the changes in the back-scattering cross section due to changing of the parameters of the reflector. The parameters are the number (N) of elements, the length (a) and characteristic impedance (Z_o) of the transmission lines, the distance (d) between adjacent dipole elements, and the distance (h) from the elements to the plate.

The most important results obtained by this numerical investigation is:

(1) that the back-scattering cross section becomes larger if a distance of 0.35 wavelengths from the dipoles to the plate is used instead of 0.25 wavelengths as used by Sharp,

(2) that the shape of the curves of back-scattering becomes more irregular when more elements are used in the reflector but the level of back-scattering is increased,

(3) that the shape of the curves of back-scattering becomes more smooth when a mismatch between the elements and the transmission lines is introduced in such a way that the characteristic impedance of the line is larger than the self-impedance of the dipole. However, the magnitude of the back-scattered energy is then decreasing more rapidly for oblique directions of incidence,

(4) that for certain lengths of the transmission lines the back-scattering in the direction normal to the reflector tends to zero. This is in accordance with the results obtained for the four element linear reflector mentioned in section 4.

In Scientific Report No. 5 a great number of numerical results obtained by the parameter variation is given as curves of the back-scattering cross section.

6. BANDWIDTH PROPERTIES OF THE SQUARE

VAN ATTA REFLECTOR

The final work on the contract deals with a computation of the bandwidth properties of a 16 element square Van Atta reflector similar to the experimental model used by Sharp.

Part of this work is an investigation of the influence on the backscattering properties of the reflector of a change in the length of the dipole elements. In the previous investigations on this contract only reflectors consisting of half-wave dipoles have been investigated. The examination of the influence of the length of dipoles is carried out along the same lines as the examination of the influence of the other parameters of the reflector as described in Scientific Report No. 5. This means that the length of the dipoles is changed while keeping all other parameters of the reflector fixed with values corresponding to the dimensions of the experimental reflector used by Sharp.

The results of this investigation is shown in fig. 6 of this report. From this it turns out as expected that the back-scattered energy decreases both when the dipole length is less than and greater than half a wavelength. This is due to the fact that the matched half-wave dipole has optimal reradiating properties. However, when the dipoles are less than half a wavelength the mutual coupling between the dipoles decrease and a better retrodirective effect of the reflector is obtained. This effect is further strengthened because of the mismatch between the dipole and the transmission line, the self resistance R_A of the dipole being less than the characteristic impedance Z_0 of the line. This is in accordance with the results of the investigation of the four element linear reflector where it was found that the deviation from retrodirective effect decreases when the factor R_A/Z_0 decreases.

The bandwidth properties of the 16 element square Van Atta reflector similar to the experimental reflector used by Sharp with or without the conducting plate has been computed and the results are shown in figs. 7a and 8a. The curves show the back-scattered energy for different angles of incidence as a function of λ/λ_0, where λ_0 is the wavelength corresponding to the center frequency.

For increasing values of λ/λ_0 larger than 1.0 the back-scattered energy from the reflector without a conducting plate decreases in a regular manner for all angles of incidence.

For values of λ/λ_o < 1.0 the shape of the curves is very irregular and gives no information at all. When the conducting plate is taken into account the curves for λ/λ_o > 1.0 are almost as regular as when the plate is not present but the level of back-scattered energy is higher for directions of incidence near normal incidence (0°) and lower for directions of incidence near broadside (90°). For λ/λ_o < 1.0 the curves are just as irregular as in the case where the plate is not present.

However, from the results of this investigation it turned out that the retrodirective effect of this 16 element reflector is essentially improved when λ/λ_o = 1.3. This corresponds to a 16 element square Van Atta reflector with the following parameter values:

length of dipoles	0.385	λ
radius of dipoles	0.0115	λ
distance between dipoles	0.462	λ
distance from dipoles to plate	0.192	λ
length of transmission lines	0.315	λ
characteristic impedance of		
transmission lines	73.0	ohms

A measure of retrodirective effect is given in figs. 7b and 8b as

$$M = \frac{\text{number of examined angles of incidence giving retrodirective effect}}{\text{total number of angles of incidence examined}} \cdot 100\%$$

For the reflector without a plate M obtaines its maximum 90% for the above-mentioned wavelength λ = 1.3λ_o of the incident plane wave. When the conducting plate is present the optimum value of M is 50% and this value is obtained in the whole range from λ = 1.1λ_o to λ = 1.5λ_o. The reason for the decrement of M in the second case is that the retrodirective effect is reduced when the direction of incidence turns towards broadside because of interference with the field scattered from the conducting plate.

However it is obvious in both cases that a Van Atta reflector with a better retrodirective effect than the effect measured by Sharp may be obtained from the same physical reflector at the expense of the reradiated energy if the reflector is used at lower frequencies than the center-frequency.

7. CONCLUSION

In this report a survey of the investigations performed under
Contract AF 61(052)-794 "Reflector Array" has been given including the
results of the final work on the contract which have not been described
in any previous report.

By comparing the results obtained with the objectives of the con-
tract as stated in section 1 of this report it is seen that the first
period of the text may be covered by Scientific Reports Nos. 1, 2, 4, and
5. The second period is in part covered by Scientific Report No. 4. The
linear and two-dimensional array mentioned in the third period has been
investigated while the other configurations mentioned in this period have
not been dealt with. The fourth and last period is covered in Scientific
Report No. 3 for a linear array.

Further an investigation of the bandwidth properties of a square
reflector has been carried out.

Using the theory explained in the reports issued under this contract
it should be possible to investigate other types of Van Atta reflectors.
This might be as well reflectors consisting of dipoles mounted in two- or
three-dimensional arrays for example over conducting cylinders or spheres,
as reflectors consisting of other types of antenna elements such as horns,
paraboloid antennas, crossed dipoles or monopoles.

Probably results which compare better with the experimental results
measured by Sharp may be obtained using another theory for the field re-
flected from the conducting plate than the physical optics theory used in
Scientific Report No. 5. This theory may be Keller's geometrical theory of
optics which, in contrast to the theory used, will take into account the
scattering of the incident field about the edges of the conducting plate.

8. COMPUTER PROGRAM

In Appendix 1 a copy of the computer program developed for the numerical investigation of square Van Atta reflectors with or without a conducting plate is printed.

The program is written in FORTRAN IV and the computer used in an IBM 7090 run by the Northern Europe University Computing Center, Technical University of Denmark.

9. REFERENCES

Papers issued under this contract are marked with an asterisk (*).

1. L.C. Van Atta, Electromagnetic reflector, U.S. Patent no 2908002, Serial no 514040, Oct. 6, 1959.

2. E.D. Sharp, Properties of the Van Atta reflector array, Rome Air Development Center, New York, Tech Rept RADC-TR-58-53, ASTIA Document no AD 148684, April 1958.

3. J.A. Fusca, Compact reflector has ECM potential, Aviation Week, vol 70, pp. 66-69, Jan. 5, 1959.

4. E.D. Sharp and M.A. Diab, Van Atta reflector array, IRE Trans. on Antennas and Propagation, vol AP-8, pp. 436-438, July 1960.

5. L.H. Bauer, Technique for amplitude modulating a Van Atta radar reflector, Proc. IRE, vol 49, p. 634, March 1961.

6. R.C. Hansen, Communications satellites using arrays, Proc. IRE, vol 49, pp. 1066-1074, June 1961, and the same, pp. 1340-1341, Aug.1961.

7. W.F. Bahret, Technique for amplitude modulating a Van Atta radar reflector . Correspondance, Proc. IRE, vol 49, p 1962, Nov. 1961.

8. K. Walther, Model experiments with acoustic Van Atta reflectors . J.Acoust.Soc.Amer., vol 34, no. 5, pp. 665-674, May 1962.

9. R.D. Wanselow, A proposed high gain wide angle coverage, passive, modulated re-radiator . IRE Trans. on Antennas and Propagation, vol AP-10, p. 785, Nov. 1962.

10. D.E.N. Davies, Some properties of Van Atta arrays and the use of 2-way amplification in the delay paths, Proc. IEE, vol 110, no 3, pp. 507-512, March 1963.

11. D.E.N. Davies, et al., Discussion on some properties of Van Atta arrays and the use of 2-way amplification in the delay paths, Proc. IEE, vol 111, no 5, pp. 980-982, May 1964.

12. S.N. Andre, and D.J. Leonard, An active retrodirective array for satellite communications, IEEE Trans. on Antennas and Propagation, vol AP-12, pp. 181-186, March 1964.

13. E.L. Gruenberg, and C.M. Johnson, Satellite communications relay system using a retrodirective space antenna, IEEE Trans. on Antennas and Propagation, vol AP-12, pp. 215-223, March 1964.

14. R.C. Hansen, Preface to the Special Issue on Active and Adaptive Antennas, IEEE Trans. on Antennas and Propagation, vol AP-12, pp. 140-141, March 1964.

15. R.W. Bickmore, Adaptive antenna arrays, IEEE Spectrum, vol 1, no 8, pp. 78-88, Aug. 1964.

16. J.L. Ryerson, Passive satellite communication . Proc. IRE, vol 48, pp. 613-619, April 1960.

17. M.I. Skolnik, and D.D. King, Self-phasing array antennas, IEEE Trans. on Antennas and Propagation, vol AP-12, pp. 142-149, March 1964.

18. R.N. Ghose, Electronically adaptive antenna systems, IEEE Trans. on Antennas and Propagation, vol AP-12, pp. 161-169, March 1964.

19. A.F. Kay, Comments on Self-phasing array antennas, and Electronically adaptive antenna systems , IEEE Trans. on Antennas and Propagation, vol AP-12, pp. 792-793, Nov. 1964.

20. M.J. Whithers, An active Van Atta array, Proc. IEE, vol 111, pp. 982-984, May 1964.

21. J. Kaiser, and I. Kay, Passive and active reflectors, Radio Science, J.Res.NBS, vol 68 D, pp. 515-517, April 1964.

22. J.L. Ryerson, Scatterer echo area enhancement, Proc. IRE, vol 50, pp. 1979-1980, Sep. 1962.

23. C.T. Tai, Scattering by arrays linked by transmission lines, Proc. of the "Symposium on Generalized Networks", New York 1966.

24. J. Appel-Hansen, The Van Atta reflector, Forskning, vol 75, no 8, November 1966 (in Danish).

25.* Tove Larsen, Reflector arrays, IEEE Trans. on Antennas and Propagation, vol AP-14, pp. 689-693, November 1966.

26.* J. Appel-Hansen, A Van Atta reflector consisting of half-wave dipoles, IEEE Trans. on Antennas and Propagation, vol. AP-14, pp. 694-700, November 1966.

27.* Tove Larsen, A theoretical investigation of Van Atta arrays, Scientific Report No. 1, Contract No. AF 61(052)-794, Laboratory of Electromagnetic Theory, Technical University of Denmark, November 1964.

28.* J. Appel-Hansen, Linear Van Atta reflector consisting of four half-way dipoles, Scientific Report No. 2, Contract No. AF 61(052)-794, Laboratory of Electromagnetic Theory, Technical University of Denmark, November 1964.

29.* J. Appel-Hansen, Experimental investigation of a linear Van Atta reflector, Scientific Report No. 3, Contract No. AF 61(052)-794, Laboratory of Electromagnetic Theory, Technical University of Denmark, May 1965.

30.● J. Appel-Hansen, Optimization of the reradiation pattern of a Van Atta reflector, Scientific Report No. 4, Contract No. AF 61(052)-794, Laboratory of Electromagnetic Theory, Technical University of Denmark, June 1966.

31.● Tove Larsen and E. Dragø Nielsen, Square Van Atta reflector with or without a conducting plate, Scientific Report No. 5, Contract No. AF 61(052)-794, Laboratory of Electromagnetic Theory, Technical University of Denmark, August 1966.

32.● Tove Larsen, Reflector arrays, Annual Summary Report, Contract No. AF 61(052)-794, Laboratory of Electromagnetic Theory, Technical University of Denmark, April 1965.

33.● E. Dragø Nielsen, Reflector arrays, Annual Summary Report, Contract No. AF 61(052)-794, Laboratory of Electromagnetic Theory, Technical University of Denmark, May 1966.

34. J. Appel-Hansen, The reradiation pattern of a passive Van Atta reflector, Laboratory of Electromagnetic Theory, Technical University of Denmark, Lic.Techn.-Thesis, March 1966.

35. J. Appel-Hansen, The Van Atta array and its applications, Laboratory of Electromagnetic Theory, Technical University of Denmark, IR 34, January 1966.

36. M.H. Østfeldt, Linear array as a passive reflector, Laboratory of Electromagnetic Theory, Technical University of Denmark, M.Sc. Thesis, 1963 (in Danish).

37. B. Munch-Andersen, The application of dynamic programming in designing antenna arrays, especially Van Atta reflectors, M.Sc. Thesis, Laboratory of Electromagnetic Theory, Technical University of Denmark, 1965, (in Danish).

38. E.C. Jordan, Electromagnetic waves and radiating systems, Prentice Hall, 1950.

39. D.E. Kerr, Propagation of short radio waves, M.I.T. Rad.Lab.Ser., vol 13, p. 456, McGraw Hill 1951.

APPENDIX 1

$IBFTC ATTA   DECK

ATTA   - EFN SOURCE STATEMENT - IFN(S) -

```
C
C
C
C      CALCULATION OF RERADIATION PATTERN OF SQUARE VAN ATTA REFLECTOR
C      WITH AND WITHOUT A CONDUCTING PLATE
C
C
C      THE INPUT PARAMETERS ARE
C      COMMON INPUT
C
C      I     = NUMBER OF ELEMENTS IN EACH ROW
C      J     = 1 IF CONDUCTING PLATE IS TAKEN INTO ACCOUNT, ELSE J=0
C      KPQ   = ANGLE OF INCIDENCE WILL BE CHOSEN AS KPQ+F*10 (PHC.....))
C      MCB   = C IF RESULTS IN DECIBELS, 1 IF RESULTS IN DIRECT
C              NUMERICAL VALUES AND 2 IF BOTH CASES ARE WANTED
C
C      C     = DISTANCE BETWEEN ELEMENTS        (IN WAVELENGTHS)
C      R     = DISTANCE FROM ELEMENTS TO PLATE (IN WAVELENGTHS)
C      B     = LENGTH OF TRANSMISSION LINES     (IN WAVELENGTHS)
C      ZO    = CHARACTERISTIC IMPEDANCE OF TRANSMISSION LINES (IN OHMS)
C      RAD   = DIPOLE RADIUS                    (IN WAVELENGTHS)
C      DLE   = LENGTH OF DIPOLES                (IN WAVELENGTHS)
C
C      W     = ANGLE OF POLARIZATION OF INCIDENT WAVE     (IN DEGREES)
C      FII   = ANGLE OF INCIDENCE OF INCOMING PLANE WAVE (IN DEGREES)
C
C      LFI   = ANGLE OF REFLECTION                          (IN DEGRE
C      MA    = C IF NEW CALCULATIONS ARE WANTED, ELSE MA = 1
C      BW    = 1 IF BANDWIDTH CALCULATIONS ARE WANTED, ELSE BW
C            = C IF PARAMETER VARIATION IS WANTED
C
C      IF BW = 1 (BANDWIDTH CALCULATION) USE FOLLOWING INPUT
C
C      MDIP  = C IF THE PHYSICAL LENGTH OF DIPOLES  HAS TO BE UNCHANGED
C              ELSE MDIP = 1
C      MD    = C IF THE PHYSICAL DISTANCE D*LAMBDAO HAS TO BE UNCHANGED
C              ELSE MD   = 1
C      MR    = C IF THE PHYSICAL DISTANCE R*LAMBDAO HAS TO BE UNCHANGED
C              ELSE MR   = 1
C      MB    = C IF THE PHYSICAL LENGTH   B*LAMBDAO HAS TO BE UNCHANGED
C              ELSE MB   = 1
C
C      DIFF = HALF THE RANGE OVER WHICH THE FACTOR LAMBDA/LAMBDAO
C             IS VARIED
C      RATIO= THE STEPS IN WHICH THE FACTOR LAMBDA/LAMBDAO IS VARIED
C             (LAMBDA = FREQENCY, LAMBDAO = CENTER FREQUENCY)
C
```

```
                014CC2
                    ATTA        -  EFN    SCURCE STATEMENT  -  IFN(S)  -

C        IF BW = C (PARAMETER VARIATICN) USE THE FCLLCWING INPUT
C
C           DI   = STEPS IN CHANGING I   DURING PARAMETER VARIATICN
C           CC   = STEPS IN CHANGING D   DURING PARAMETER VARIATICN
C           DR   = STEPS IN CHANGING R   DURING PARAMETER VARIATICN
C           CDB  = STEPS IN CHANGING B   DURING PARAMETER VARIATICN
C           DZ   = STEPS IN CHANGING ZC  DURING PARAMETER VARIATICN
C           CCLE = STEPS IN CHANGING DLE DURING PARAMETER VARIATICN
C
C           IMX  = MAXIMUM VALUE CF I   IN PARAMETER VARIATICN
C           CMX  = MAXIMUM VALUE CF D   IN PARAMETER VARIATICN
C           RMX  = MAXIMUM VALUE CF R   IN PARAMETER VARIATICN
C           BMX  = MAXIMUM VALUE CF B   IN PARAMETER VARIATICN
C           ZMX  = MAXIMUM VALUE CF ZC  IN PARAMETER VARIATICN
C           CLMX = MAXIMUM VALUE CF DLE IN PARAMETER VARIATICN
C
C
C
        DIMENSION A(72,72),C(72),X(72),U(72,10)
        DIMENSION H(36,6),Q(2,1C),S(5),V(36,10),IB(6)
        DIMENSION G(19,10),TETAI(1C),PHII(10),VV(10),T(19),F(19)
        INTEGER BW,DI,PAGINA
  369   FORMAT(3I5)
  301   FORMAT (4I5)
  302   FORMAT(4F9.3)
  303   FORMAT(2F9.3)
  304   FORMAT(3F9.3)
  305   FORMAT(6F9.3)
  306   FORMAT(I5,5F9.3)
  100   READ(5,3C1) I,J,KPQ,MDB
        READ(5,3C5) D,R,B,ZO,RAC,DLE
        READ(5,303) W,FII
        READ(5,369) LFI,MA,BW
C
        IF(BW.EQ.1) READ(5,301) MDIP,MD,MR,MB
        IF(BW.EQ.1) READ(5,303) DIFF,RATIC
C
        IF(BW.EQ.C) READ(5,3C6) DI,CD,DR,CCB,DZ,CCLE
        IF(BW.EQ.C) READ(5,3C6) IMX,DMX,RMX,BMX,ZMX,CLMX
C
        IF(BW.EQ.C) DIFF = 0.
        IF(BW.EQ.C) MCIP = 1
        K=1C
        LTETA=10
        FAKTOR=1.C-DIFF
        PAGINA = C
        IST=I
        CST=C
        RST=R
        BST=B
        ZST=ZD
        CLST=CLE
C
        IF(BW.EQ.1) GO TO 5C2
        IF(BW.EQ.C) GO TO 5C3
  501   I=1 +CI
```

```
       014C02
            ATTA       -  EFN    SCLRCE STATEMENT  -  IFN(S)  -

       GO TO 515
510    C=C +CD
       CO TO 515
512    B=B +CCB
       GO TO 515
513    ZC=ZC+DZ
       CO TO 515
511    R=R +CR
       CO TC 515
514    CLE=CLE+CCLE
C
515    IF(CW.EQ.C) GC TO 5C3
502    IF(MC.EQ.C) C=C/FAKTCR
       IF(MR.EQ.C) R=R/FAKTCR
       IF(MB.EQ.C) B=B/FAKTCR
5C3    C=C*6.2831853
       R=R*6.2831853
       B=B*6.2831853
       PAGINA = PAGINA + 1
       N=I**2
       M=I/2
       IF(M*2-I) 11,12,11
11     LE=1
       GO TO 2
12     LE=C
2      MM=(I-LE)/2+5/1CC
       CO 13 M=1,MM
13     S(M)=(FLOAT(I)/2.-FLCAT(M)+C.5)*D
       LL=(I-LE+1)/2
       CO 15 L=1,LL
       CO 15 M=1,I
       L1=(L-1)*I+M
       H(L1,2)= S(L)
       L2=I-L+1+(M-1)*I
       H(L2,1)= S(L)
       L3=N-I+M-(L-1)*I
       H(L3,2)=-S(L)
       L4=L+(M-1)*I
       H(L4,1)=-S(L)
       IF(LE) 14,15,14
14     L5=(I-1)/2+(M-1)*I+1
       H(L5,1)=C.C
       L6=(I*(I-1))/2+M
       H(L6,2)=C.C
15     CONTINUE
       II=I**2
       FAKT1 = 1.CCCCCC
       IF(MCIP.EQ.0) FAKT1 = FAKTCR
       CALL BETA(II,J,ZC,R,H,FAKT1,RAD,CLE)
       TAL=0.
       OPC=FLOAT(KPQ)/1C.
       TAL=TAL+1.
       CLE=CLE/FAKT1
       CO 24 M=1,K
       YM = M
       VV(M)=W
```

```
      014CC2
            ATTA        -  EFN   SCURCE STATEPENT -  IFN(S)  -

      PHII(M)=FII
      XM = YM-OPQ
      XK=K-1
      TETAI(M)=(XM*SC.)/XK
      IF(ABS(TETAI(M))-SC.) 22,21,22
   21 IF(ABS(PHII(M))-9C.) 22,25,22
   22 TETI=TETAI(M)*C.01745325S25
      Z=0.C174532925
      OP=(COS(3.14159265*DLE*SIN(TETI)*SIN(FII*Z))-CCS(3.14159265*CLE))*
     1 (SIN(W*Z)*CCS(FII*Z)-COS(W*Z)*SIN(FII*Z)*CCS(TETI))/(SQRT(1.-
     2 SIN(TETI)**2*SIN(FII*Z)**2)*SIN(3.14159265*CLE))


      Q(1,M)=P*(1.-FLOAT(J)*CCS(2.*R*CCS(TETI)))
      Q(2,M)=-P*FLOAT(J)*SIN(2.*R*CCS(TETI))
      CO 23 L=1,N
   23 CV(L,M)=-H(L,1)*COS(FII*Z)*SIN(TETI)
     1         -H(L,2)*SIN(FII*Z)*SIN(TETI)
   24 CONTINUE
      GO TO 26
   25 K=K-1
C
C     NOW THE ALXILIARY ARRAY HAS BEEN CALCULATED
C
   26 CALL MAT1(LE,I,N,J,B,IB,A,H)
      IF(LE-1) 11C,41,11C
   41 CALL MAT2(LE,I,N,J,B,A,H)
  110 CONTINUE
C
      CO 50 L=1,K
      IF(LE-1) 49,48,49
   48 N1=(N+1)/2
      N2=(3*N+1)/2
      C(N1) =(Q(1,L)*COS(V(N1,L))-C(2,L)*SIN(V(N1,L)))*CCS(B)
      C(N2) =(Q(1,L)*SIN(V(N1,L))+C(2,L)*CCS(V(N1,L)))*CCS(B)
   49 MM=(N-LE)/2
      NL=2*N+L
      CO 8CC M=1,MM
      NM1=N+1-M
      MN=N+M
      M1=M+(N+LE)/2
      M2=M+(3*N+LE)/2
      RVM = Q(1,L)*CCS(V(M,L))-C(2,L)*SIN(V(M,L))
      CVM = Q(1,L)*SIN(V(M,L))+C(2,L)*CCS(V(M,L))
      RVM1 = Q(1,L)*COS(V(NM1,L))-C(2,L)*SIN(V(NM1,L))
      CVM1 = Q(1,L)*SIN(V(NM1,L))+C(2,L)*CCS(V(NM1,L))
      C(M) = (RVM-RVM1)*COS(B*C.5)
      C(M1)= (RVM+RVM1)*SIN(B*C.5)
      C(MN)= (CVM-CVM1)*COS(B*C.5)
  800 C(M2)= (CVM+CVM1)*SIN(B*C.5)

C     NOW THE MATRIX IS FILLED UP AND THE SCLVING CF THE
C     EQUATIONS WILL START

      IF(L-1) 7CC,6CC,7C0
  600 CALL SCLVE(2*N,A,C,1,C.01,5,X,IT)
```

```
          GO TC  52
 700      CALL SOLVE(2*N,A,C,2,C.C1,5,X,IT)
  52      N2= 2*N
          DO 51 KM=1,N2
  51      U(KM,L)=X(KM)
  50      CONTINUE
C
C         NOW THE RERADIATION PATTERN WILL BE CALCULATEC
C
          IF(IT) 94,55,55
  55      KLM = 0
 210      IF(KLM) 230,22C,230
 220      FI=LFI+18C
          KT= 9C
          GO TO 240
 230      FI=LFI
          KT=1CC
 240     OCALL PATT(KLM,KT,K,I,N,J,D,R,W,ZC,FII,LTETA,FI,TETAI,H,U,G,T,F,CLE
         1)
          KLM=KLM+1
          IF(KLM-1) 281,21C,281
 281      WRITE (6,3CC)
          WRITE (6,71) N,PAGINA
          WRITE (6,72)
          WRITE (6,74)
          IF(J.EQ.1) WRITE(6,76)
          IF(BW.EQ.C) GC TO 31C
          WRITE(6,2CC) FAKTOR
          IF(MDIP.EQ.0) WRITE(6,333)
          IF(MD.EQ.C) WRITE(6,444)
          IF(MR.EQ.C) WRITE(6,555)
          IF(MB.EQ.0) WRITE(6,666)
 310      IF(MDB.NE.C) GO TO 120
          DO 111 MK = 1,19
          DO 111 KK = 1,K
 111      G(MK,KK) = DB(G(MK,KK))
 120      AA = B/6.28318531
          DPI=D/6.28316531
  77      WRITE(6,177) DPI
          WRITE(6,777) RAD
          WRITE(6,888) DLE
          WRITE (6,175) AA
          HH=R/6.28318531
          IF(J-I) 18C,178,180
 178      WRITE (6,179) HH
 180      WRITE(6,181) ZO
          IF(MDB.NE.C) WRITE(6,3C)
          WRITE (6,78) (TETAI(M),M=1,K)
          WRITE (6,79) (PHII(M),M=1,K)
          WRITE (6,8C) (VV(M),M=1,K)
          WRITE (6,81)
C
          DO 84 MK=1,19
  84      WRITE (6,9C) T(MK),F(MK),(G(MK,M),M=1,K)
          IF(MDB.NE.2) GO TO 96
          WRITE(6,3C)
```

```
      014CC2
          ATTA        -  EFN    SCLRCE STATEMENT  -  IFN(S)  -


      CO 112 MK = 1,1S
      CO 112 KK = 1,K
 112  G(MK,KK) = DB(G(MK,KK))
      CO 113 MK = 1,1S
 113  WRITE(6,9C) T(MK),F(PK),(G(MK,M),M=1,K)
      GO TO 96
  94  WRITE(6,95)
  96  C=CPI
      B=AA
      R=HH
      IF(BW.EQ.1) GO TO 5C4
      IF(DI.NE.C.AND.I.LT.IMX) GC TC 501
      DI=0
      I=IST
      IF(DC.NE.0..AND.D.LT.DMX) GO TO 510
      DD=C.
      C=CST
      IF(CCB.NE.0..AND.B.LT.BMX) GC TC 512
      CDB=0.
      B=BST
      IF(DZ.NE.C..AND.ZO.LT.ZMX) GC TC 513
      CZ=0.
      ZO=ZST
      IF(DR.NE.C..AND.R.LT.RMX) GO TC 511
      CR=0.
      R=RST
      IF(DDLE.NE.0..AND.DLE.LT.DLMX) GO TC 514
      DDLE=0.
      DLE=DLST
C
 504  IF(BW.EQ.0) GO TO 505
C
      IF(MD.EQ.C) D=D*FAKTCR
      IF(MR.EQ.C) R=R*FAKTCR
      IF(MB.EQ.0) B=B*FAKTCR
      DLE=DLE*FAKT1
      FAKTOR= FAKTOR+RATIO
      IF(FAKTOR.LT.1.C+DIFF) GC TC 502
 505  IF(MA) 93,100,93
  93  CONTINUE
 300  FORMAT (1H1)
  71 OFORMAT(31H SQUARE VAN ATTA REFLECTCR WITH,I3,10H  ELEMENTS,50X,4HP
     1AGE,I4)
  72 OFORMAT(102H-CALCULATED RERACIATICN PATTERN *G* IN THE CIRECTICN CI
     1VEN BY THE ANGLES TETA AND FI FCR VARICUS CASES)
  74 OFORMAT(67H OF INCIDENCE AND PCLARIZATICN -GIVEN BY THE ANGLES TETA
     1I,FII AND V)
  76  FORMAT(48HCHERE THE CONDLCTING PLATE IS TAKEN INTC ACCCUNT)
 200 OFORMAT(45HOBANCWIDTH CALCULATICNS FCR  LAMBDA/LAMBCAO =,F8.3,4H AN
     1D)
 333 OFORMAT(62H NO VARIATION CF PHYSICAL DIPCLE LENGTH (LENGTH= 0.5* LA
     1MBDAC))
 444  FORMAT(5CH NO VARIATION CF PHYSICAL DISTANCE BETWEEN DIPCLES)
 555  FORMAT(43H NC VARIATION CF PHYSICAL HEIGHT CVER PLATE)
 666  FORMAT(41H NO VARIATION CF PHYSICAL LENGTH CF LINES)
 177  FORMAT (27HODISTANCE BETWEEN ELEMENTS=,F10.5,13H  WAVELENCTHS)
```

```
      014C02
          ATTA        -  EFN    SCURCE STATEMENT  -  IFN(S)  -

 777  FORMAT(27H DIPOLE RADIUS =              ,F11.3,12H WAVELENGTHS)
 888  FORMAT(27H DIPOLE LENGTH =              ,F11.3,12H WAVELENGTHS)
 175  FORMAT (29H LENGTH OF TRANSMISSICNLINES=,F8.2,13H  WAVELENGTHS)
 179  FORMAT(33H DISTANCE FROM ELEMENTS TC PLATE=,F4.2,13H  WAVELENGTHS)
 181 OFORMAT(48HOCHARACTERISTIC IMPEDANCE OF TRANSMISSICN LINES=,F5.2,6H
     1 OHMS)
  30  FORMAT(48HORERADIATION PATTERN VALUES MEASUREC IN CECIBELS)
  78  FORMAT(9H-TETAI=   ,2X,10F9.1)
  79  FORMAT(9H FII  =   ,2X,10FS.1)
  80  FORMAT(9H V    =   ,2X,10FS.1)
  81  FORMAT(11HCTETA      FI)
  90  FORMAT(1H ,F4.1,F6.0,10FS.2)
  95  FORMAT(42H1***THE SYSTEM OF EQUATICNS IS SINGULAR***)
      STOP
      END


  $IBFTC DECI     DECK


      REAL FUNCTION DB(X)
 C
 C    * DB * CONVERTS THE RERADIATEC ENERGY INTC DECIBELS
 C
      DB = -9CC.C
      XI = 1COCCCCC.*X
      KX = IFIX(XI)
      IF(KX.NE.0) GO TO 1
      RETURN
   1  CB = 10.*ALOG1C(X)
      RETURN
      ENC
```

014CC2

$IBFTC SUB1   CECK

SUB1   - EFN   SOURCE STATEMENT - IFN(S) -


```
      SUBROUTINE MAT1(LE,I,N,J,B,IB,A,H)
C
C     *MAT1* COMPUTES THE FIRST PART CF THE MATRIX ECUATICN
C
      CIMENSION IB(6),A(72,72),H(36,6)
      MM=(N-LE)/2
      CO 32 M=1,MM
      CO 30 L=1,I
      MX=M-L+I
      IF(1CO*MX-5) 27,30,3C
   27 IF(1CO*(MX-LE)+50*I-5) 28,29,29
   28 LL=N-2*M+2
      GO TO 31
   29 LL=2*MX+N-2*L+I+2*I
      GO TO 31
   30 CONTINUE
C
   31 Y=((1,3)-FLOAT(J)*H(1,5)-H(LL,3)+FLOAT(J)*H(LL,5))*CCS(B*0.5)
      A(M,2*M-1)= Y
      MN=M+N
      A(MN,2*M)= Y
      NM1=2*(N-M)+1
      NM2=2*(N-M)+2
      ML1=M+(N+LE)/2
      ML2=M+(3*N+LE)/2
      A(M,NM1)= -Y
      A(MN,NM2)= -Y
C
      OY=-(H(1,4)-FLCAT(J)*H(1,6)-H(LL,4)+FLCAT(J)*H(LL,6))*CCS(B*0.5)
     1   +SIN(B*0.5)
      A(M,2*M)= Y
      A(MN,NM1)= Y
      A(M,NM2)= -Y
      A(MN,2*M-1)= -Y
C
      Y=(H(1,3)-FLOAT(J)*H(1,5)+H(LL,3)-FLCAT(J)*H(LL,5))*SIN(B*0.5)
      A(ML1,2*M-1)= Y
      A(ML1,NM1)= Y
      A(ML2,2*M)=  Y
      A(ML2,NM2)= Y
C
      OY=-(H(1,4)-FLOAT(J)*H(1,6)+H(LL,4)-FLCAT(J)*H(LL,6))*SIN(B*0.5)
     1   -COS(B*0.5)
      A(ML1,2*M)= Y
      A(ML1,NM2)= Y
      A(ML2,2*M-1)= -Y
      A(ML2,NM1)= -Y
```

```
O14CC2
     SUB1        -  EFN   SCLRCE STATEMENT  -  IFN(S)  -

 32  CONTINUE

     MM=(N-3*LE)/2
     LL=(N-LE)/2
     CO 40 M=1,MM
     ML=M+1
     IF(LL-ML) 5SS,EE8,888
888  CO 4C L=ML,LL
     K1=C
     L2= L-M
     CO 35 M1=M,L,L2
     K1=K1+1
     CO 34 L1=1,LL
     MX=M1-L1+I
     IF(2*MX-1) 33,34,34
 33  IB(K1)=MX+I-1
     K1=K1+1
     IB(K1)=L1-1
     GO TO 35
 34  CONTINUE
 35  CONTINUE
     IB(5)=I-1-IB(3)
     IB(6)=I-1-IB(4)
     IF(IB(1)-IB(3)) 37,37,36
 36  LL1= I*(IB(4)-IB(2))-IB(3)+IB(1)+1
     GO TO 113
 37  LL1= I*(IB(4)-IB(2))+IB(3)-IB(1)+1
113  IF(IB(1)-IB(5)) 39,39,38
 38  LL2=I*(IB(6)-IB(2))-IB(5)+IB(1)+1
     GO TO 114
 39  LL2= I*(IB(6)-IB(2))+IB(5)-IB(1)+1
C
114  OY=(H(LL1,3)-FLOAT(J)*H(LL1,5)-H(LL2,3)+FLCAT(J)*H(LL2,5))
    1 *COS(B*C.5)
     A(L,2*M-1)=Y
     A(M,2*L-1)=Y
     NL=N+L
     NM=N+M
     NM1= 2*(N-M)+1
     NL1=2*(N-L) +1
     NM2=NM1+1
     NL2=NL1+1
     LE1=L+(N+LE)/2
     ME1=M+(N+LE)/2
     LE2=L+(3*N+LE)/2
     ME2=M+(3*N+LE)/2
     A(NM,2*L)= Y
     A(NL,2*M)= Y
     A(L,NM1)= -Y
     A(M,NL1)= -Y
     A(NL,NM2)= -Y
     A(NM,NL2)= -Y
C
     OY=-(H(LL1,4)-FLOAT(J)*H(LL1,6)-H(LL2,4)+FLCAT(J)*H(LL2,6))
    1 *COS(B*C.5)
     A(L,2*M)=Y
```

```
      014C02
         SUB1        -   EFN    SCLRCE STATEMENT  -    IFN(S)   -

      A(M,2*L)=Y
      A(NL,NM1)= Y
      A(NM,NL1)= Y
      A(L,NM2)= -Y
      A(M,NL2)= -Y
      A(NL,2*M-1)= -Y
      A(NM,2*L-1)= -Y
C
      OY=(H(LL1,3)-FLCAT(J)*H(LL1,5)+H(LL2,3)-FLCAT(J)*H(LL2,5))
     1  *SIN(B*C.5)
      A(LE1,2*M-1)= Y
      A(ME1,2*L-1)= Y
      A(LE1,NM1)= Y
      A(ME1,NL1)= Y
      A(LE2,2*M)= Y
      A(ME2,2*L)= Y
      A(LE2,NM2)= Y
      A(ME2,NL2)= Y
C
      OY=-(H(LL1,4)-FLOAT(J)*H(LL1,6)+H(LL2,4)-FLCAT(J)*H(LL2,6))
     1  *SIN(B*C.5)
      A(LE1,2*M)= Y
      A(ME1,2*L)= Y
      A(LE1,NM2)= Y
      A(ME1,NL2)= Y
      A(LE2,2*M-1)= -Y
      A(ME2,2*L-1)= -Y
      A(LE2,NM1)= -Y
      A(ME2,NL1)= -Y
   40 CONTINUE
  999 CONTINUE
      RETURN
      ENC
```

014CC2

$IBFTC SUB2   CECK

SUB2   - EFN   SOURCE STATEMENT - IFN(S) -

```
      SUBROUTINE MAT2(LE,I,N,J,B,A,H)
C
C     *MAT2* COMPUTES THE SECCND PART CF THE MATRIX ECUATICN
C
      CIMENSION A(72,72),H(36,6)
      Y=(H(1,3)-FLOAT(J)*H(1,5))*CCS(B)
C
      NE=(N+LE)/2
      NE1=(3*N+LE)/2
      A(NE,N)= Y
      A(NE1,N+1)= Y
      A(NE,N+1)= -(H(1,4)-FLOAT(J)*H(1,6))*CCS(B)+SIN(P)
      A(NE1,N)= -A(NE,N+1)
C
      MM=(N-LE)/2
      CO 47 M=1,MM
      LL=(N-LE)/2
      CO 43 L=1,LL
      MX=M-L+I
      IF(2*MX-1) 42,43,43
   42 NX=MX+I-1
      NY=I-1
      GO TO 44
   43 CONTINUE
   44 IF(2*NX-I) 46,46,45
   45 LL3= I*((I-1)/2-NY)+(3-I)/2+NX
      GO TO 115
   46 LL3= I*((I-1)/2-NY)+(1+I)/2-NX
C
  115 Y=(H(LL3,3)-FLOAT(J)*H(LL3,5))*COS(B)
      NM=N+M
      N1=(N+1)/2
      N2=(3*N+1)/2
      NM1=2*(N-M)+1
      NM2= NM1+1
      M2= (3*N+1)/2+M
      M1= (N+1)/2+M
      A(N1,2*M-1)= Y
      A(N1,NM1)= Y
      A(N2,NM2)= Y
      A(N2,2*M)= Y
C
      Y=-(H(LL3,4)-FLOAT(J)*H(LL3,6))*CCS(B)
      A(N1,2*M)= Y
      A(N1,NM2)= Y
      A(N2,2*M-1)= -Y
      A(N2,NM2)= -Y
```

```
      014CC2
          SUB2        -   EFN    SCLRCE STATEMENT  -  IFN(S)  -
C
      Y=2.*(H(LL3,3)-FLOAT(J)*H(LL3,5))*SIN(B*0.5)
      A(M2,N+1)= Y
      A(M1,N)= Y
      A(M1,N+1)= -2.*(H(LL3,4)-FLCAT(J)*H(LL3,6))*SIN(B*0.5)
      A(M2,N)= -A(M1,N+1)
      A(M,N)=0.C
      A(M,N+1)=C.C
      A(NM,N)= C.C
   47 A(NM,N+1)= 0.C
      RETURN
      ENC
```

014C02

```
$IBFTC SUB3      CECK

SUB3        -   EFN    SOURCE STATEMENT  -  IFN(S)  -


      OSUBROUTINE PATT(KLM,KT,K,I,N,J,D,R,W,ZC,FII,LTETA,FI,TETAI,H,U,
     1                 G,T,F,DLE)
C
C     *PATT* COMPUTES THE RERACIATICN PATTERN CF THE REFLECTCR
C
      CIMENSION TETAI(10),H(36,6),L(72,10),G(19,10),T(19),F(19)
      PO(X)= SIN(0.5*X*XI*D)/(C.5*X*XI*C)
      MKM=C
      CO 91 NTETA=1C,KT,LTETA
      MKM=MKM+1
      MK= KLM* 9+MKM
      NX = (MKM-11)*(KLM-1)+ MKM * KLM
      IF(KLM) 260,25C,260
  250 MTETA=1CC-NTETA
      GO TO 27C
  260 MTETA=NTETA - 1C
  270 CO 89 M=1,K
      GR=0.
      GI =0.
      Y=3.1415926S/180.
      TETA=MTETA
      TETA = TETAI(NX)
      T(MK)=TETA
      F(MK)=FI
      OXK1=120.*3.14159265*(COS(3.14159265*DLE*SIN(TETA*Y)*SIN(FI*Y))
     1   -COS(3.14159265*DLE))/(ZC*SQRT(1.-(SIN(TETA*Y)*SIN(FI*Y))**2)*
     2     SIN(3.14159265*DLE))

      N2=2*N
      CO 84 L=1,N2,2
      L1=(L+1)/2
      C1=H(L1,1)*SIN(TETA*Y)*CCS(FI*Y)+H(L1,2)*SIN(TETA*Y)*SIN(FI*Y)
      AA= U(L,M)
      NL=L+1
      BB= U(NL,M)
      GR=GR+AA*COS(C1)+BB*SIN(C1)
      GI=GI-AA*SIN(C1)+BB*COS(C1)
   84 CONTINUE
      IF(J-1) 87,85,87
   85 CO 86 L=1,N2,2
      L1=(L+1)/2
      OC1=H(L1,1)*SIN(TETA*Y)*CCS(FI*Y)+H(L1,2)*SIN(TETA*Y)*SIN(FI*Y)
     1   -2.*R*COS(TETA*Y)
      AA= U(L,M)
      NL=L+1
      BB= U(NL,M)
      AN=N
```

```
C14CC2
         SUB3        -   EFN   SCLRCE STATEMENT   -   IFN(S)   -

      CR=GR-AA*COS(C1)-BB*SIN(C1)
      GI=GI+AA*SIN(C1)-BB*CCS(C1)
 86   CONTINUE
      XI=I
      AR=COS(R*(COS(TETAI(M)*Y)+CCS(TETA*Y)))
      AI=SIN(R*(COS(TETAI(M)*Y)+CCS(TETA*Y)))
      AL=SIN(TETAI(M)*Y)*CCS(FII*Y)+SIN(TETA*Y)*CCS(FI*Y)
      BE=SIN(TETAI(M)*Y)*SIN(FII*Y)+SIN(TETA*Y)*SIN(FI*Y)
      AL1=AL*1CCCCC.
      BE1=BE*1CCCCC.
      IF(IFIX(AL1)) 29C,291,29C
 291  SAL=1.
      GO TO 292
 29C  SAL = PC(AL)
 292  IF(IFIX(BE1)) 294,293,294
 293  SBE=1.
      GO TO 295
 294  SBE = PC(BE)
 295  XK2= C.5*SAL*SBE*AN*D**2
      TP=COS(W*Y)*COS(FII*Y)+SIN(W*Y)*CCS(TETAI(M)*Y)*SIN(FII*Y)
      TT=-COS(W*Y)*SIN(FII*Y)+SIN(W*Y)*CCS(TETAI(M)*Y)*CCS(FII*Y)
      FT=-TP*CCS(FI*Y)*CCS(TETA*Y)+TT*SIN(FI*Y)*CCS(TETA*Y)
      FP=TP*SIN(FI*Y)+TT*CCS(FI*Y)
      OG(MK,M)= ((XK1*GR*SIN(FI*Y)*CCS(TETA*Y) + XK2*AR*FT)**2
     1          +(XK1*GI*SIN(FI*Y)*CCS(TETA*Y) + XK2*AI*FT)**2
     2          +(XK1*GR*CCS(FI*Y) + XK2*AR*FP)**2
     3          +(XK1*GI*CCS(FI*Y) + XK2*AI*FP)**2)/(3.14159265**3)

 87  IF(J-1) 88,89,88
 88  OG(MK,M)=XK1**2*(GR**2+GI**2)*((SIN(FI*Y))**2*(CCS(TETA*Y))**2
     1     +(CCS(FI*Y))**2)/(3.14159265**3)
 89  CONTINUE
 91  CONTINUE
     RETURN
     END
```

014CC2

```
$IBFTC IMPZ      CECK

IMPZ      -  EFN   SOURCE STATEMENT  -  IFN(S)  -


      SUBROUTINE BETA(II,J,ZC,R,H,FAKTCR,RAD,DLE)
C
C     *BETA* BUILDS UP AN ARRAY CF SELF- AND MUTUAL IMPEDANCES
C
      DIMENSION H(36,6)
      CALL SELF(DLE/FAKTOR,RAD,RS,XS)
      DO 2C M=1,II
      IF(M-1) 17,16,17
   16 H(1,3) = RS/ZC
      H(1,4) =-XS/ZC
      GO TO 18
   17 OZ= AMPE(DLE/FAKTOR,DLE/FAKTCR,
     1                ABS(C.1591549*(H(1,1)-H(M,1))),
     1        ABS(C.1591549*(H(1,2)-H(M,2))),0.0,0.0,1,0.001,10)
      H(M,3)=Z/ZO
      OZ= AMPE(DLE/FAKTOR,DLE/FAKTCR,
     1                ABS(C.1591549*(H(1,1)-H(M,1))),
     1        ABS(C.1591549*(H(1,2)-H(M,2))),0.0,0.0,0,0.001,10)
      H(M,4)=Z/ZO
   18 IF(J) 19,2C,19
   19 OZ= AMPE(DLE/FAKTOR,DLE/FAKTCR,
     1                0.1591549*SQRT((H(1,1)-H(M,1))**2+4.*(R**2)),
     1        ABS(C.1591549*(H(1,2)-H(M,2))),0.0,0.0,1,0.001,10)
      H(M,5)=Z/ZO
      OZ= AMPE(DLE/FAKTOR,DLE/FAKTCR,
     1                C.1591549*SQRT((H(1,1)-H(M,1))**2+4.*(R**2)),
     1        ABS(C.1591549*(H(1,2)-H(M,2))),0.0,0.0,0,0.001,10)
      H(M,6)=Z/ZO
   20 CONTINUE
      RETURN
      END
```

014CC2

```
$IBFTC XCAL     DECK

XCAL       -  EFN   SOURCE STATEMENT  -  IFN(S)  -

      SUBROUTINE SELF(H,A,R,X)
C
C     *SELF* COMPUTES THE SELF IMPEDANCE OF THE CIRCLES
C
      COMPLEX CSINT,CINSI
      PI=3.14159265
      AA=SQRT(2.)*2.*PI*A
      HH=PI*H
      CSINT=CINSI(2.*HH)
      CI2= 0.577215665+ALOG(2.*HH)-REAL(CSINT)
      S2= REAL(CSINT)
      SI2= AIMAG(CSINT)
      CSINT= CINSI(4.*HH)
      CI4= 0.577215665+ALOG(4.*HH)-REAL(CSINT)
      S4= REAL(CSINT)
      SI4= AIMAG(CSINT)
      X= -29.997925*(SIN(2.*HH)*(-0.577215665+ALOG(HH/(AA**2))+2.*CI2
     C            -CI4) - COS(2.*HH)*(2.*SI2-SI4)-2.*SI2)
      R=  29.997925*((2.+2.*COS(2.*HH))*S2-COS(2.*HH)*S4
     C            -2.*SIN(2.*HH)*SI2+SIN(2.*HH)*SI4)
      X=X/(SIN(HH)**2)
      R=R/(SIN(HH)**2)
   12 CONTINUE
   13 CONTINUE
      RETURN
      END
```

014C02

```
$IBFTC CINSI    DECK

CINSI      - EFN    SOURCE STATEMENT  - IFN(S)  -


      COMPLEX FUNCTION CINSI(X)
C CINSI COMPUTES AS ITS REAL PART THE MODIFIED COSINE INTEGRAL AND AS
C ITS IMAGINARY PART THE SINE INTEGRAL.
      IF (X.GT.1.1) GO TO 20
      C=1.0
      S=1.0
      TC=1.C
      TS=1.0
      Y=X*X
      I=0
   10 I=I+1
      TC=-Y*TC/FLOAT(2*I*(2*I-1))
      TS=-Y*TS/FLOAT(2*I*(2*I+1))
      TERMC=TC/FLOAT(2*I)
      TERMS=TS/FLOAT(2*I+1)
      C=C+TERMC
      S=S+TERMS
      EC=ABS(TERMC/C)
      ERROR=1.CE-8
      IF (EC.GT.ERROR) GO TO 1C
      CIN=1.0-C
      SI=X*S
      CINSI=CMPLX(CIN,SI)
      RETURN
   20 Y=X*X
      F=(Y*(Y*(Y*(Y+38.027264)+265.187033)+335.677320)+38.102495)/
     C (X*(Y*(Y*(Y*(Y+40.021433)+322.624911)+57C.236280)+157.105423))
      G=(Y*(Y*(Y*(Y+42.242855)+3C2.757865)+352.018498)+21.821899)/
     C (Y*(Y*(Y*(Y*(Y+48.196927)+482.485984)+1114.978885)+449.690326))
      S=SIN(X)
      C=COS(X)
      CIN=0.577215665+ALOG(X)-F*S+G*C
      SI=1.57079633-F*C-G*S
      CINSI=CMPLX(CIN,SI)
      RETURN
      END
```

C14CC2

```
$IBFTC ZCAL      CECK

ZCAL        - EFN   SOURCE STATEMENT - IFN(S) -


      REAL FUNCTION AMPE(H1,H2,YC,ZC,TETA,FI,NC,CELTA,MCRC)
C
C     *AMPE* COMPUTES THE MUTLAL IMPEDANCES BETWEEN THE CIRCLES BY AN
C            INTEGRATION USING ROMBERG'S METHCC
C
C     THE REAL PART CF THE MUTLAL IMPEDANCE FOR NC=1 ANC
C     THE IMAGINARY PART FOR NC=C
C
      DIMENSION TRAP(11)
      STEP= H2
      X= -H2/2.
      C1=RX(H1,H2,YC,ZC,TETA,FI,NC,X)
      X=H2/2.
      FC=RX(H1,H2,YC,ZC,TETA,FI,NC,X)
      TRAP(1)=(C1+FC)*STEP/2.
      C1=C.
      CO 2C3 K=1,MCRC
      SUM=C.
      ERRCR=C.
      STEP=STEP/2.
      M=2**K
      MM=M-1
      CO 2C4 L=1,MM,2
      LL=M-L
      XL=FLCAT(LL)
      XM=FLCAT(M)
      X=XL/XM
      X=X*(-H2/2.)+(1.-X)*H2/2.
      FO=RX(H1,H2,YC,ZC,TETA,FI,NC,X)
      C2=SUM+FC
      IF(ABS(FC)-ABS(SLM)) 2C6,2C6,2C5
  205 ERRCR=ERRCR+SLM-(C2-FC)
      CO TO 207
  206 ERRCR=ERROR+FC-(C2-SLM)
  207 SUM=C2
  204 CONTINUE
      TRAP(K+1)=TRAP(K)/2.+(C2+ERRCR)*STEP
      P=1.
      KK=1C-K
      CO 2C8 LL=KK,9,1
      L=-(LL-1C)
      P=P*4.
  208 TRAP(L)=(TRAP(L+1)*P-TRAP(L))/(P-1.)
      C2= TRAP(1)
      IF(K-1) 2C9,2C9,211
  211 IF(ABS(C2-C1)-CELTA*ABS(C2)) 21C,210,2C9
  209 C1=C2
```

```
      C14CC2
            ZCAL        -   EFN    SCLRCE STATEMENT  -  IFA(S)  -
  203 CONTINUE
      MORC=K-1
  210 Q=25.97925/SIN(3.14159265*H1)/SIN(3.14159265*H2)
      IF(NO-1) 2C1,2CC,2C1
  2CC AMPE= -Q*C2
      GCTC 202
  201 AMPE=  Q*C2
  202 CONTINUE
      RETURN
      ENC
```

014CC2

INTG   - EFN   SOURCE STATEMENT - IFN(S) -

```
      REAL FUNCTION RX(H1,H2,YC,ZC,TETA,FI,NC,X)
C
C     * RX * COMPUTES THE FUNCTION TO BE INTEGRATED IN ROUTINE AMPE
C
      B1=H1/2.
      B2=H2/2.
      A=COS(TETA)
      B=SIN(TETA)
      C=B*SIN(FI)
      D=B*COS(FI)
      E=2.*COS(3.14159265*H1)
      F=Z0+B1
      G=Z0-B1
      SX=X*C
      SY=X*C
      SZ=X*A
      RO2=SX**2 +(YC+SY)**2
      H=Z0+SZ
      R=SQRT(RO2+H**2 )
      HH=F+SZ
      P=G+SZ
      R1=SQRT(RO2+HH**2 )
      R2=SQRT(RO2+P**2 )
      IF(NO-1) 214,211,214
  211 AK=SIN(6.28318531*R1)/R1
      AL=SIN(6.28318531*R2)/R2
      AM=SIN(6.28318531*R) /R
      GO TO 212
  214 AK=COS(6.28318531*R1)/R1
      AL=COS(6.28318531*R2)/R2
      AM=COS(6.28318531*R) /R
  212 CONTINUE
      IF(YO) 218,215,218
  215 IF(SX) 218,216,218
  216 IF(SY) 218,217,218
  217 RX=(E*AM-AK-AL)*A*SIN(6.28318531*(B2-ABS(X)))
      GO TO 219
  218 RX=((AK*HH+AL*P-E*AM*H)*(X*(C**2)+YO*C+X*(C**2))/RO2
     1    +(E*AM-AK-AL)*A)*SIN(6.28318531*(B2-ABS(X)))
  219 CONTINUE
      RETURN
      END
```

014C02

```
$IBFTC SOLV    CECK

SOLV      -  EFN    SOURCE STATEMENT - IFN(S)  -


      SUBROUTINE SOLVE(NN,A,B,IN,EPS,ITMAX,X,IT)
C
CSOLVE    LINEAR EQUATION SOLVER WITH ITERATIVE IMPRCVEMENT    VERSICN IV
C      SOLVES AX=B WHERE A IS NXN MATRIX AND B IS NX1 VECTCR
C      IN=
C          1 FOR FIRST ENTRY
C          2 FOR SUBSEQUENT ENTRIES WITH NEW B
C          3 TO RESTORE A ANC B
C      EPS AND ITMAX ARE PARAMETERS IN THE ITERATICN
C      IT=
C          -1 IF A IS SINGULAR
C          0 IF NOT CCNVERGENT
C          NUMBER OF ITERATIONS IF CCNVERGENT
C      CALLS MAP SUBROUTINES ILOG2,OCT,SOCT AND CAD
C
C      TO MODIFY DIMENSIONS, CHANGE THE NEXT 3 (NCT 2 BUT 3) CARCS.
C
      OCIMENSION A(72,72),B(72),X(72),DX(72),R(72),Z(72),RM(72),IRP(72),
     1AA(72,72)
      MA=72
C      MA MUST = DECLARED DIMENSICN CF SYSTEM
      EQUIVALENCE(R,DX)
      GO TO (1CCC,2CCO,3CCC),IN
 1000 N=NN
      NM1=N-1
      NP1=N+1
C
C      EQUILIBRATION
C
      CO 51C I=1,N
          KTOP=ILOG2(A(I,1))
          DO 503 J=2,N
  503     KTOP=MAXC(KTOP,ILOG2(A(I,J)))
          RM(I)=2.C**(-KTOP)
          DO 5C9 J=1,N
  509     A(I,J)=A(I,J)*RM(I)
  510 CONTINUE
C
C      SAVE EQUILIBRATED DATA
C
      DO 548 I=1,N
      DO 548 J=1,N
  548 AA(I,J)=A(I,J)
C
C      GAUSSIAN ELIMINATION WITH PARTIAL PIVCTING
C
      CO 59 M=1,NM1
```

```
      014CC2
          SOLV        -  EFN   SCLRCE STATEMENT  -  IFN(S)  -

          TOP=ABS (A(N,M))
          IMAX=M
          CO 12 I=N,N
              IF(TOP-ABS (A(I,M)))10,12,12
   10         TOP=ABS (A(I,M))
              IMAX=I
   12     CONTINUE
          IF(TOP)14,13,14
   13     IT=-1
C         *SINGULAR*
          RETURN
   14     IRP(M)=IMAX
   23     IF(IMAX-M)29,29,24
   24     CC 25 J=1,N
              TEMP=A(M,J)
              A(M,J)=A(IMAX,J)
   25         A(IMAX,J)=TEMP
   29     MP1=M+1
          CO 33 I=MP1,N
              EM=A(I,M)/A(M,M)
              A(I,M)=EM
              IF(EM)31,33,31
   31         CC 32 J=MP1,N
   32         A(I,J)=A(I,J)-A(M,J)*EM
   33     CONTINUE
   99 CONTINUE
      IRP(N)=N
      IF (A(N,N))12C,113,120
  113 IT=-1
      RETURN
  120 CONTINUE
C     STORAGE FOR A NOW CONTAINS TRIANGULAR L ANC U SC THAT (L+I)*U=A
C
C     CUPLICATE INTERCHANGES IN DATA
C
      CO 229 I=1,N
          IP=IRP(I)
          IF(I-IP)221,229,221
  221     CO 222 J=1,N
              TEMP=AA(I,J)
              AA(I,J)=AA(IP,J)
  222         AA(IP,J)=TEMP
  229 CONTINUE
C
C     PROCESS RIGHT HAND SIDE
C
 2000 CONTINUE
      CO 6C1 I=1,N
  601     B(I)=B(I)*RM(I)
      CO 609 I=1,NM1
          IP=IRP(I)
          TEMP=B(I)
          B(I)=B(IP)
          B(IP)=TEMP
  609 CONTINUE
C
```

```
      014C02
          SOLV        -  EFN    SCURCE STATEPENT - IFN(S) -

C     SOLVE FOR FIRST APPROXIMATICN TC X
C
  199 CO 2CO I=1,N
  2CO Z(I)=-SDOT(I-1,A(I,1),MA,Z(1),1,-B(I))
      CO 201 K=1,N
      I=NP1-K
  201 X(I)=-SDOT(N-I,A(I,I+1),MA,X(I+1),1,-Z(I))/A(I,I)
C
C     ITERATIVE IMPROVEMENT
C
      IF(ITMAX)37C,370,3CO
  300 TOP=0.0
      DO 303 I=1,N
  303 TOP=AMAX1(TOP,ABS(X(I)))
      EPSX=EPS*TOP
      CO 369 IT 1,ITMAX
C         FIND RESIDUALS
          DO 319 I=1,N
  319     R(I)=-DOT(N,AA(I,1),MA,X(1),1,-B(I))
C         FIND INCREMENT
          DO 329 I=1,N
  329     Z(I)=-SDOT(I-1,A(I,1),MA,Z(1),1,-R(I))
          DO 339 K=1,N
          I=NP1-K
  339     DX(I)=-SDOT(N-I,A(I,I+1),MA,DX(I+1),1,-Z(I))/A(I,I)
C         INCREMENT AND TEST CCNVERGENCE
          TOP=C.C
          DO 342 I=1,N
                TEMP=X(I)
                X(I)=CAD(X(I),DX(I))
                CELX=ABS (X(I)-TEMP)
                TOP=AMAX1(TCP,DELX)
  342     CONTINUE
          IF(TOP-EPSX)381,381,369
  369 CONTINUE
  370 IT=0
  381 RETURN
C
C     RESTORE A AND 8
C
 3000 CONTINUE
      CO 709 K=1,N
          I=NP1-K
          IP=IRP(I)
          IF(I-IP)7C1,709,7C1
  701     TEMP=B(I)
          B(I)=B(IP)
          8(IP)=TEMP
          DO 7C2 J=1,N
                TEMP=AA(I,J)
                AA(I,J)=AA(IP,J)
  702           AA(IP,J)=TEMP
  709 CONTINUE
      CO 729 I=1,N
          B(I)=B(I)/RM(I)
          DO 729 J=1,N
```

```
        A(I,J)=AA(I,J)/RM(I)
    729 CONTINUE
        RETURN
        ENC
```

```
$IBFTC LOG       CECK
```

```
        INTEGER FLNCTION ILOG2(Z)
C
C      *ILOG2* ROUTINE FOR LSE WITH RCUTINE SCLVE
C
        ILCG2=C
        IF (Z.NE.C.) GC TO 1
        RETURN
      1 ILOG2=AINT(3.322C*ALOG10(ABS(Z)))
        RETURN
        END
```

C14CC2

```
$IBMAP DOT.      84




*    DOT AND FRIENDS      ROUTINES FOR USE WITH SOLVE
         ENTRY    DOT (N,A(1),MA,B(1),MB,C)    DOUBLE INNER PRODUCT
         ENTRY    SDOT (N,A(1),MA,B(1),MB,C)   INNER PRODUCT
         ENTRY    ILOG2 (A)    FLOATING POINT EXPONENT
         ENTRY    DAD (A,B)    ADD WITH ROUND
*
SNAD     MACRO    M        STORE NEGATIVE OF ADDRESS IN DECREMENT
         SUB      =0100000            COMPLEMENT IF POSITIVE
         ALS      18
         STD      M
         ENDM     SNAD
*
DOT      SAVE     1,2,4




         STZ      S
         STZ      S+1
         CLA*     8,4                 C
         LDQ      C+1
         STO      C
         CLA*     3,4                 N
         TZE      NONE                SKIP LOOP IF N = 0
         STO      N


         CLA      4,4                 BASE ADDRESS OF A
         PAC      ,1                  X1=-(BASE OF A)
         CLA*     5,4                 MA
         SNAD     MA
         CLA      6,4                 BASE ADDRESS OF B
         PAC      ,2                  X2=-(BASE OF B)
         CLA*     7,4                 MB
         SNAD     MB
         LXA      N,4                 X4=N
LOOP     LDQ      0,1                 A(I)
         FMP      0,2                 B(I)
         DFAD     S
         DST      S


MA       TXI      *+1,1,**            (X1)=(X1)+MA
MB       TXI      *+1,2,**            (X2)=(X2)+MB
         TIX      LOOP,4,1            END OF MAIN LOOP
NONE     DFAD     C
```

```
          FRN
          RETURN  DOT
*
SDOT      SAVE    1,2,4




          STZ     S
          CLA*    8,4
          STO     C
          CLA*    3,4
          TZE     SNONE
          STO     N
          CLA     4,4
          PAC     ,1
          CLA*    5,4
          SNAD    SMA


          CLA     6,4
          PAC     ,2
          CLA*    7,4
          SNAD    SMB
          LXA     N,4
SLOOP     LDQ     0,1
          FMP     0,2
          FAD     S
          STO     S
SMA       TXI     *+1,1,**
SMB       TXI     *+1,2,**
          TIX     SLOOP,4,1
SNONE     FAD     C
          RETURN  SDOT
*
ILOG2     CAL*    3,4
          ANA     =0377000000000


          SUB     =0200000000000
          ARS     27
          TRA     1,4
*
DAD       CLA*    3,4
          FAD*    4,4
          FRN
          TRA     1,4
*
          EVEN
```

```
C        PZE
         PZE
S        PZE
         PZE
N        PZE
         *LDIR

         *LORG

         END
```
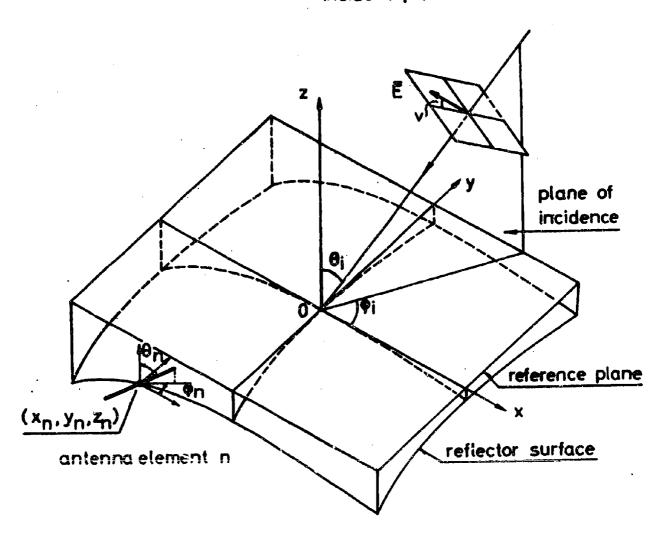
/

incident plane wave

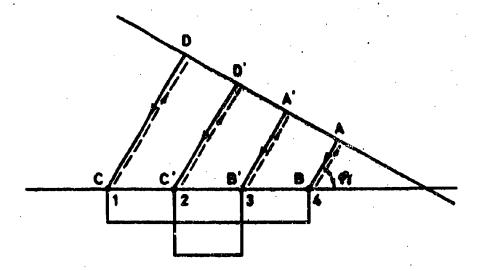Fig 1. Coordinate system for arbitrary Van Atta array.

Fig 2. The Van Atta principle (retrodirective effect).
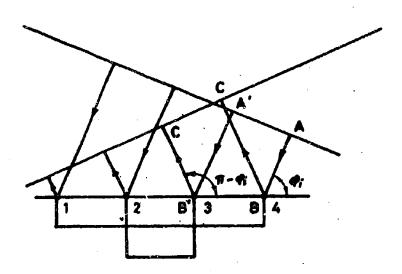The paths ABCD and A'B'C'D' are equal.

Fig 3. The specular reflection (mirror effect).
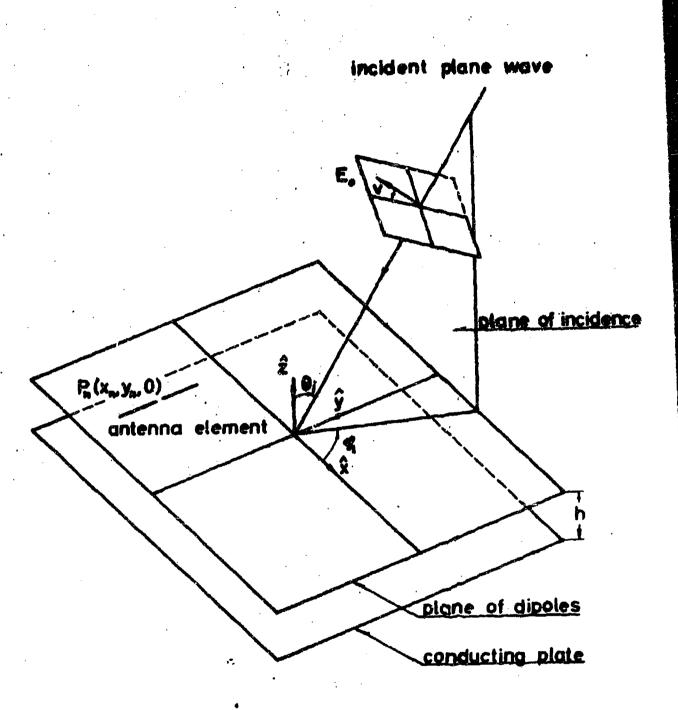The paths ABC and A'B'C' are equal.

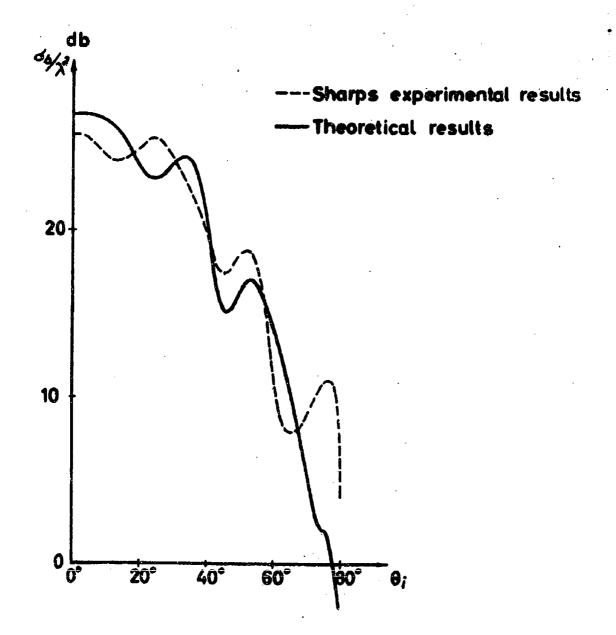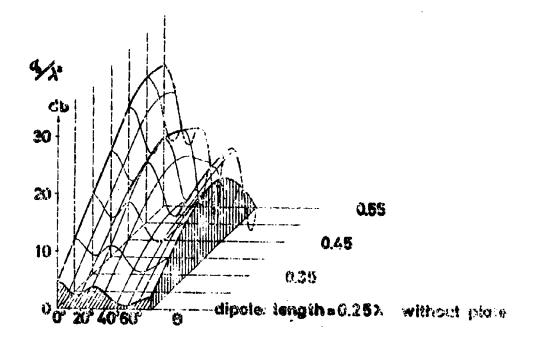Fig 4. Square Van Atta reflector with conducting plate.

Fig.5. Normalized back-scattering cross section
of 16 element square Van Atta reflector
with conducting plate.
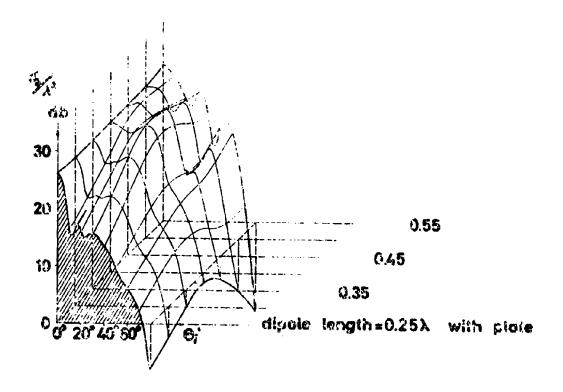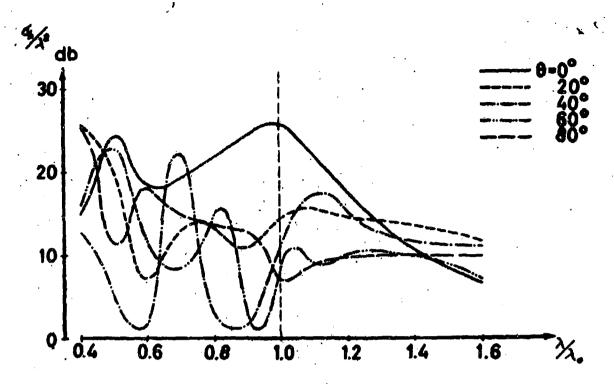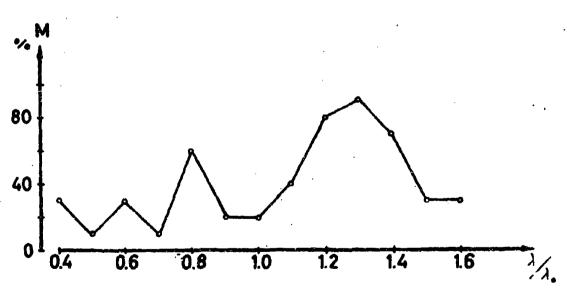a=0.41λ , d=0.6λ , h=0,25λ , Z$_e$ =73ohms,
η=0°, v =90°

Fig.6. Normalized back-scattering cross section
as a function of the length of the dipoles.
N=16 elements, a=0.41λ, d=0.6λ, h=0.25λ
Z_c=73 ohms, dipole radius=0.015λ

a. Bandwith properties.

b. Measure M of the retrodirective effect

Fig. 7. 16 element square Van Atta reflector without plate.
$a = 0,41 \lambda_0$, $d = 0,6 \lambda_0$, $Z_0 = 73$ ohms
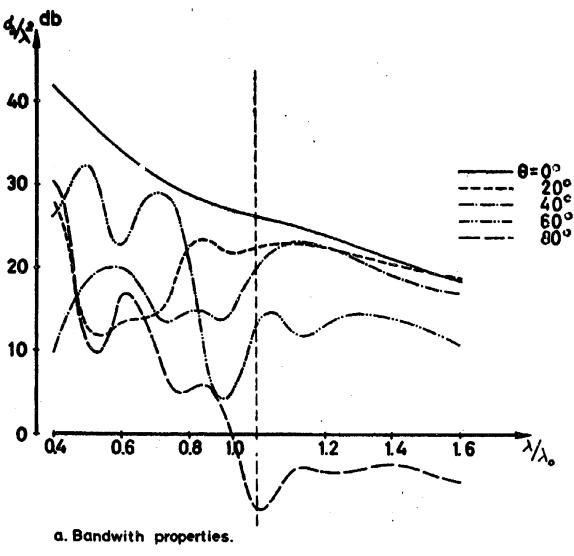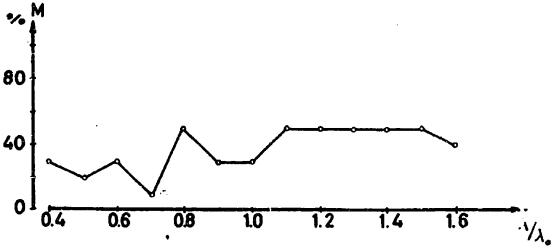dipole length $= 0,5\lambda_0$, dipole radius $= 0,015\lambda_0$
$\varphi_i = 0°$, $v = 90°$

a. Bandwith properties.

b. Measure M of the retrodirective effect.

Fig.8.16 element square Van Atta reflector with plate.
$a = 0,41\lambda_0$, $d = 0,6\lambda_0$, $h = 0,25\lambda_0$, $Z_0 = 73$ ohms
dipole length $= 0,5\lambda_0$, dipole radius $= 0,015\lambda_0$
$\varphi_i = 0°$, $v = 90°$

DOCUMENT CONTROL DATA · R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1 ORIGINATING ACTIVITY (Corporate author)	2a. REPORT SECURITY CLASSIFICATION
Laboratory of Electromagnetic Theory Technical University of Denmark, Lyngby, Denmark	unclassified
	2b GROUP

3 REPORT TITLE

REFLECTOR ARRAYS

4 DESCRIPTIVE NOTES (Type of report and inclusive dates)

Final Scientific Report, 1 April 1964 – 30 June 1967

5 AUTHOR(S) (Last name, first name, initial)

Nielsen, Erik Dragø

6 REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
15 July 1967	52	39

8a. CONTRACT OR GRANT NO. AF 61(052)-794	9a. ORIGINATOR'S REPORT NUMBER(S)
b. PROJECT NO. 4600	S 127 R 59
c. 460010	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)
d.	

10 AVAILABILITY/LIMITATION NOTICES

Distribution of this document is unlimited

11 SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY
	European Office of Aerospace Research Shell Building, 47 Cantersteen Brussels, Belgium

13 ABSTRACT The Van Atta reflector was first described in a patent by Dr. L.C.Van Atta in 1959. The advantage of this passive reflector type should be that the reradiated field has a maximum back in the direction of arrival of the primary plane wave. Since this retrodirective effect of the reflector might be of great importance if used as a navigational aid in the air or at sea, it seemed worth while to carry out a theoretical investigation of such reflectors, especially since only experimental investigations had been made before this contract was initiated.

The work performed under the contract dealt mainly with theoretical and numerical investigations of Van Atta reflectors consisting of dipoles. A survey of the literature concerning active or passive Van Atta reflectors has been made. Both a linear and a two-dimensional plane Van Atta reflector has been investigated numerically and a theory for arbitrary Van Atta reflectors has been developed. An experimental investigation of a linear Van Atta reflector was carried out and the results compared with the theoretical results.

DD FORM 1473

14	KEY WORDS	LINK A		LINK B		LINK C	
		ROLE	WT	ROLE	WT	ROLE	WT
	Van Atta reflector Reflector Array Adaptive Antenna System Dipoles Mutual Impedance Image Theory Conducting Plate Bandwidth						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

  (1) "Qualified requesters may obtain copies of this report from DDC."

  (2) "Foreign announcement and dissemination of this report by DDC is not authorized."

  (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through
    _____."

  (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through
    _____."

  (5) "All distribution of this report is controlled. Qualified DDC users shall request through
    _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.